

FORM PTO-1390
(REV. 5-93)

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
22750/492

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/869710

INTERNATIONAL APPLICATION NO.
PCT/EP99/08225

INTERNATIONAL FILING DATE
(29.10.99)
29 October 1999

PRIORITY DATE CLAIMED:
(08.01.99)
08 January 1999

TITLE OF INVENTION
THREE-Dimensionally STRUCTURED FIBROUS WEB AND A METHOD FOR ITS MANUFACTURE

APPLICANT(S) FOR DO/EO/US

GROITZSCH, Dieter; SCHAUT, Gerhard; and GRIMM, Hans-Jörg

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
 - d. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
 - e. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
 - f. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - g. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned).
 - h. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
 - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☒ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: Marked-up version of the Substitute Specification; International Search Report together with an English translation thereof; English Translation of the International Preliminary Examination Report; three (3) sheets of formal drawings and first page of published International Application WO 00/40793.

EXPRESS MAIL NO.: EL244502885US

17. ☒ The following fees are submitted:**Basic National Fee (37 CFR 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) ... \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but
international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00Neither international preliminary examination fee (37 CFR 1.482) nor international
search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1000.00International preliminary examination fee paid to USPTO (37 CFR 1.482) and all
claims satisfied provisions of PCT Article 33(2)-(4) \$100.00

CALCULATIONS | PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate
Total Claims	10 - 20 =	0	X \$18.00
Independent Claims	2 - 3 =	0	X \$80.00
Multiple dependent claim(s) (if applicable)			+ \$270.00

\$

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 860.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must
also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$ 860.00

Processing fee of \$130.00 for furnishing the English translation later the ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

+

TOTAL NATIONAL FEE =

\$ 860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

TOTAL FEES ENCLOSED =

\$ 860.00

Amount to be:
refunded

\$

charged \$860.00

- a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of \$860.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0600. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Kenyon & Kenyon
One Broadway
New York, New York 1000426646
PATENT TRADEMARK OFFICERichard L. Mayer, Reg. No. 22,490
NAME

DATE

7/2/01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Dieter GROITZSCH et al.
Serial No. : To Be Assigned
Filed : Herewith
For : THREE-DimensionALLY Structured Fibrous Web and A
Method for Its Manufacture
Art Unit : To Be Assigned
Examiner : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend the above-identified application before examination, as set forth below.

IN THE FIGURES:

Without prejudice, please cancel original Figures 2 and 3.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

IN THE CLAIMS:

Without prejudice, please cancel original claims 1-15, and substitute claims 1-7, and please insert new claims 16-25 as follows:

--16. (New) A three-dimensionally structured fibrous web comprising:

a composite;

the composite being subjected to one of a thermal embossing-calendering and an ultrasound calendering and being shrunk by an influence of one of heat and water vapor;

wherein the composite consists of one of a scrim, a lattice and a netting, the one of the scrim, the lattice and the netting being covered on both sides by a nonwoven fabric;

wherein the one of the scrim, the lattice and the netting is made of thermoplastic continuous-filaments having a mesh, the mesh having points of contact and filament crossing points in longitudinal and transverse directions;

wherein the mesh has a mesh size of 0.01 to 9 cm²;

wherein the continuous filaments are 150 to 2000 µm thick and are thermally fused to each other at their points of contact;

wherein the filament crossing points in the longitudinal and transverse directions are not less distant from each other than 0.10 cm; and

wherein the nonwoven fabric layer has one of repeating fold-shaped elevations and repeating wave-shaped elevations.

17. (New) The fibrous web according to claim 16,

wherein the thermoplastic continuous-filaments of the one of the scrim, the lattice and the netting have a first thickness at the crossing points and a second thickness between the crossing points, the first thickness being up to seven times the second thickness.

18. (New) The fibrous web according to claim 16,

wherein the nonwoven fabric has individual fibers, the individual fibers being bonded to each other using a bonding agent that has a hard grip.

19. (New) The fibrous web according to claim 16,

wherein the nonwoven fabric is made up of one of core bicomponent fibers, sheath bicomponent fibers and side-by-side bicomponent fibers, the one of the core bicomponent fibers, the sheath bicomponent fibers and the side-by-side bicomponent fibers consisting of components, the components being different with respect to their softening point.

20. (New) A method for manufacturing a three-dimensionally structured fibrous web comprising the following steps:

covering one of at least one lattice layer, at least one scrim layer and at least one netting layer with a nonwoven fabric layer on both sides, each layer of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer weighing 3 to 300 g/m², the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer being made of plastic continuous filaments having a mesh, the mesh having filament crossing points and having a mesh size of 0.01 to 9 cm² and being biaxially stretched, a distance of adjacent ones of the filament crossing points being not less than 0.10 cm;

bonding the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer with the nonwoven fabric layer on both sides in continuous fashion using a laminating technique;

subjecting the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer with the nonwoven fabric layer on both sides which has been bonded to one of a thermal embossing-calendering and an ultrasound calendering; and

subsequently subjecting the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer with the nonwoven fabric layer on both sides which was subjected to the one of the thermal embossing-calendering and the ultrasound calendering to a shrinking process at a temperature which lies between a softening and melting range of a material of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer.

21. (New) The method according to claim 20, further comprising the steps of:

covering at least one layer of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer on one of one side and both sides with an unbonded nonwoven, the at least one layer of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer having a shrinkable component, the shrinkable component having a melting point, the unbonded nonwoven being made up at least partly of bicomponent fibers having a high- and a low-melting component, the low-melting component having a melting point that is not higher than the melting point of the shrinkable component;

subjecting the at least one layer of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer covered on the one of one side and both sides with

the unbonded nonwoven to one of a thermal embossing-calendering and an ultrasound calendering; and

subsequently carrying out a shrinking of the at least one layer of the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer covered on the one of one side and both sides with the unbonded nonwoven which was subjected to the one of the thermal embossing-calendering and the ultrasound calendering, the shrinking being carried out as a result of the influence of heat or using water vapor.

22. (New) The method according to claim 20, further comprising the step of:

stretching the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer in a longitudinal direction between rolls that are running at different speeds, and in a transverse direction using an expanding tenter frame.

23. (New) The fibrous web according to claim 17,

wherein the nonwoven fabric has individual fibers, the individual fibers being bonded to each other using a bonding agent that has a hard grip.

24. (New) The fibrous web according to claim 17,

wherein the nonwoven fabric is made up of one of core bicomponent fibers, sheath bicomponent fibers and side-by-side bicomponent fibers, the one of the core bicomponent fibers, the sheath bicomponent fibers and the side-by-side bicomponent fibers consisting of components, the components being different with respect to their softening point.

25. (New) The method according to claim 21, further comprising the step of:

stretching the one of the at least one lattice layer, the at least one scrim layer and the at least one netting layer in a longitudinal direction between rolls that are running at different speeds, and in a transverse direction using an expanding tenter frame.-- .

REMARKS

This Preliminary Amendment cancels without prejudice Figures 2 and 3, original claims 1-15 and substitute claims 1-7 in the underlying PCT Application No. PCT/EP99/08225, and adds without prejudice new claims 16-25. The new claims conform the claims to U.S. Patent and Trademark Office rules, and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(iii) and § 1.125(b)(2), a Marked Up Version Of The Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) is respectfully requested.

The underlying PCT Application No. PCT/EP99/08225 includes an International Search Report, mailed April 4, 2000. The Search Report includes a list of documents that were uncovered in the underlying PCT Application. A copy of the Search Report accompanies this Preliminary Amendment.

The underlying PCT application also includes an International Preliminary Examination Report, dated March 23, 2001, and annexes. An English translation of the International Preliminary Examination Report and the annexes thereto, accompany this Preliminary Amendment.

Applicants assert that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

Dated: 7/2/01

By: 

Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

[22750/492]

THREE-Dimensionally STRUCTURED FIBROUS WEB AND A METHOD FOR
ITS MANUFACTURE

FIELD OF THE INVENTION

The present invention relates to a three-dimensionally
structured fibrous web and a method for manufacturing a three-
dimensionally structured fibrous web.

By "three-dimensionally structured" is meant here fibrous webs
in which the orientation and the spatial coordination of the
individual fibers with respect to each other in any given
surface plane diverge from those in the next closest surface
plane.

In particular, the present invention relates to the field of
fibrous webs, in which nonwoven fabric layers are bonded on
both sides to at least one layer made of a scrim, a lattice,
or a netting and a method for its manufacture.

BACKGROUND INFORMATION

U.S. Patent 4,302,495 shows fibrous webs.

One or a plurality of layers made of discontinuous,
thermoplastic polymer fibers and one or a plurality of layers
composed of an open-mesh netting made of coarse,
thermoplastic, continuous melt-blown fibers, which cross each
other at a preestablished angle, are bonded to each other by
thermal fusing, either continuously or in spot fashion, to
produce a web having a uniform thickness. The randomly running
short fibers have a diameter of between 0.5 and 30 μm at a
weight per unit area of 10 to 15 g/m^2 . Both the combination,

WO 98/52458, the webs being composed of a scrim, lattice, or netting and being bonded to nonwoven fabric layers on both sides.

SUMMARY OF THE INVENTION

An objective of an exemplary embodiment and/or exemplary method the present invention is to indicate a three-dimensionally structured fibrous web which stands up to pressure spikes up to 1 psi acting perpendicular to the surface plane without being destroyed, even at temperatures up to 60° C.

According to an exemplary embodiment of the present invention, at least two nonwoven fabric layers are bonded, in each case, to one scrim layer. The nonwoven fabric layers are made up of fibers that are bonded to each other mechanically and/or thermally and that, in the surface direction, possess a fold-like pattern in the form of geometric, repeating elevations or undulations.

Present in the above exemplary embodiment of the present invention is at least one thermoplastic scrim, lattice, or netting layer having continuous filaments crossing each other and bonded at the crossing points by fusion, the filaments having a thickness of 150 to 2000 μm between their crossing points, and having thickenings at the crossing points of up to seven times these values. For reasons of simplicity, this layer hereinafter is always termed a scrim, even if other structures having crossing individual filaments are at issue.

The mesh size of the scrim of the above exemplary embodiment, i.e., the distance in each case between two adjacent filament crossing points in the longitudinal direction, multiplied by the corresponding distance in the transverse direction, is

0.01 to 9 cm², assuming that the filament crossing points in the longitudinal as well as in the transverse direction have a distance from each other that is not less than 0.10 cm.

5 The specific bond between fiber layers and the scrim layers may be of the spot type.

10 In further exemplary embodiments of the present invention, the continuous filaments of the scrim are made up, for example, of polyethylene, polypropylene, polyamide-6, polyamide-6.6, polybutylene terephthalate, polyethylene terephthalate, polyester elastomers, copolyesters, copolymers made of ethylene and vinyl acetate or of polyurethane.

15 In a further exemplary embodiment of the present invention, the scrim is made up of a netting that is biaxially elongated. The elongation in the direction of both filament patterns is carried out in accordance with known methods in the longitudinal direction by passing through the gap between a slower moving and a more rapidly moving roll, the elongation ratio thus being determined by the ratio of the more rapidly moving to the more slowly moving rolls. In the transverse direction, the elongation is carried out using an expanding tenter frame.

25 This known method brings about a reduction in the thickness of the filaments between the mutual crossing points and therefore a reduction in the weight per unit area of up to 95%.

30 According to an aspect of a further exemplary embodiment of the present invention, it is possible to carry out the double-sided covering of the scrim using nonwoven fabric such that each nonwoven fabric layer has different properties with respect to the configuration of its folds or with respect to
35 its inherent properties, such as weight per unit area, type of

fiber, and fiber bonding.

In general, in selecting the parameters for the nonwoven fabrics with respect to composition, type of fiber, fiber bonding, and fiber orientation, the worker skilled in the art is guided by the properties known to him that these layers are supposed to have. In the interest of a high inherent rigidity of the elevations and undulations, it is necessary for the nonwoven fabric fibers to be intensively bonded to each other.

If the fibers are fixed using a bonding agent, a bonding agent having a hard grip is preferable, because in this way the inherent rigidity and mechanical resistance of the fibrous web is increased overall.

It is believed that it is advantageous if the distance from one filament crossing point to the next one in the scrim, as well as the degree of elongation and the filament strength in the longitudinal and transverse directions, are approximately the same, because in this way, after the shrinking process, elevations are produced having a circular base cross-section. These have proven to be the most resistant to pressure loads exerted perpendicular to the surface plane.

Depending on the starting material selected, multilayer fibrous webs may be produced having weights of 20 to 3000 g/m². Products having lower weights per unit area are suitable, for example, for layers in diapers that absorb and distribute liquid, such as have up to 3000 g/m² for high-volume filter matting, which have a high retention capacity for the filtrate.

The present invention is explained in greater detail on the basis of the Figure:

Figure 1 shows an exemplary embodiment of the present invention in a top view.

DETAILED DESCRIPTION

First, Figure 1 is described: here an exemplary embodiment of a three-dimensionally structured fibrous web according to the present invention is represented in a top view. Composite 1 is composed of shrunk scrim 4 and both nonwoven fabric layers 2 and 3. They are bonded to the shrunk scrim but not to each other, such that, on both sides of the scrim, elevations 6 and depressions 7 are formed on the nonwoven fabrics. Between and beneath the elevations are located hollow spaces 12, 13, which are permeable to fluid media and which absorb particles and dust from them. The scrim is made up of monofilaments 5 that cross each other.

An exemplary embodiment of a method for manufacturing the three-dimensionally structured fibrous web according to the present invention is carried out by covering, in a planar fashion, a 3-300 g/m² heavy, unshrunk scrim, netting, or lattice made of thermoplastic continuous filaments with a nonwoven fabric on both sides and by bonding using generally known laminating techniques to form a planar nonwoven fabric. The nonwoven fabric can have been produced using all known measures, i.e., dry using combing, carding, or air exposure technology, using wet deposition, or using fibers that are spun from the melted mass, or continuous filaments. Subsequently, the composite is subjected to a thermal treatment, which is sufficient for the scrim to undergo a surface shrinking. The nonwoven fabric layers, which themselves undergo either no surface shrinkage or one that is significantly less in comparison to the scrim, give way perpendicular to the surface plane, forming elevations. The nonwoven fabric can be bonded generally either over the entire

surface or over a partial surface. Perforated nonwoven fabrics can also be used for the method according to the present invention.

5 As a result of a further increase in temperature, the scrim in the nonwoven fabric is made to shrink. The shrinking temperature is determined in accordance with the softening and melting range of the thermoplastics on which the scrim is based. To trigger a shrinkage, the temperature must lie
10 between these two temperatures, the amount of shrinkage becoming higher the closer the temperature current actually affecting the knitted fabric approaches the melting temperature of the thermoplastic. Of course, the worker skilled in the art knows that, at the preestablished shrinkage
15 temperature, the duration also exerts an influence on the extent of the surface shrinkage. The attainable amounts of shrinkage in the longitudinal and transverse directions, and the ratio of both amounts to each other, can be substantially predetermined by the choice of the scrim. Assuming an
20 unhindered shrinkage free of contact, the ratio of longitudinal and transverse shrinkage is 1:1 if the monofilaments of the scrim have the same titer and the same rate of stretching in the longitudinal and transverse directions. If a different shrinkage is desired in the
25 longitudinal and transverse directions, then knit fabrics are selected whose monofilaments have been stretched differently in the longitudinal and transverse directions, or whose titers turn out to be very different given the same rate of stretching. Scrim can also be used whose monofilaments in the
30 longitudinal and transverse directions are created from different thermoplastics. In this case, the degree of shrinkage and the direction of shrinkage are determined by the components of the scrim, softening at a deeper level, a shrinkage temperature being selected which lies between the
35 softening and the melting temperatures of the lower-melting

components of the scrim.

The nonwoven fabric bonding and the lamination onto the scrim can also be carried out in one single step. Economy argues for this method.

As a nonfibrous bonding agent, liquid plastic dispersions are used, which are imprinted upon the composite either on one or on both sides, or a complete impregnation is carried out using a foamed mixture in a foam impregnating device or using an unfoamed mixture in a complete bath impregnation using the liquid plastic dispersions. Subsequently, drying is carried out and the bonding agent is cured in the heat.

As a result of the thermoplastic activation of the adhering fibers within the nonwoven fabric, additional interior reenforcement can be generated.

The ratio between longitudinal and transverse shrinkage determines the shape of the elevations in the nonwoven fabric layers. In a longitudinal/transverse ratio of 1:1, cone-shaped elevations arise that have, ideally, circular bases. In a longitudinal/transverse ratio not equal to 1, elevations arise having, ideally, oval cross-sections parallel to the base. If the shrinkage is completely prevented, for example, only in the longitudinal direction, in the longitudinal pattern, continuous, groove-shaped elevations are formed on the nonwoven fabric, which, ideally, have the same amplitude over their entire length.

It was surprising that scrims having weights under 10 g/m^2 can be shrunk to up to 80% of the starting length despite the nonwoven fabric covering on both sides having weights of at least 7 g/m^2 . It would have been expected that the nonwoven fabrics would prevent the shrinkage of the scrim, especially

at the lower starting masses per unit area of the scrim.
However, this is not the case.

The following method variants of the above exemplary
embodiment of the method according to the present invention
may be especially advantageous for reasons of simplicity:
The scrim is covered on both sides with an unbonded nonwoven
and is subjected to a thermal embossing-calendering or
ultrasound calendering. The resulting, planar, three-layer
fabric has sufficient bond strength. Subsequently, without
using a bonding agent, the shrinking is carried out thermally
or using water vapor. For these method variants, bicomponent
fibers are used having a side-by-side, eccentric or concentric
core/sheath structure. The nonwoven fabric covering(s) can be
made 100% of this bicomponent fiber or it can be used in a
blend using thermoplastic and/or non-thermoplastic homofil
fibers. With respect to the choice of homofil fibers, no
limitations are necessary.

The melting point of the bicomponent fibers, in comparison to
the lower melting components, must be lower or equal to the
melting point of the individual scrim filaments that trigger
the shrinkage. It is expedient if the melting point difference
is not greater than 40° C to prevent the nonwoven fabric
layers from becoming very brittle.

Even if the use of thermoplastic polymers contributing to the
melting bonding is not critical, it has proven to be
advantageous, in a single-side nonwoven fabric covering, to
use melting components which have a chemical similarity to the
thermoplastic polymers of the scrim. Otherwise, the danger
arises of a poor bond strength after the lamination. In this
connection, it is advantageous, for example for a scrim made
of polyethylene terephthalate filaments, to use in the
nonwoven fabric, polyester bicomponent fibers having

copolyesters or polybutylene terephthalate, which melt at over 200° C as the sheath components.

Especially if the scrim and the nonwoven fabric are supposed to be bonded using thermal embossing-calendering or ultrasound reinforcement, it is advantageous to cover the scrim on both sides with nonwovens. After the calendering, both nonwovens above and below the scrim are bonded to each other in their open areas in a pattern. The scrim in this way is inserted into the composite so as to be inseparable. The number of thermal bonding points between the nonwoven fabric and the scrim in this unshrunk half-finished material is very low to the point of being negligible. The engraved surface of the embossing roll amounts to 4-30% of the entire contact surface.

In particular in the case of a slight difference in the melting temperatures between the scrim and the shell components of the bicomponent fibers, engraving rolls are preferably used having a bonding surface of only 4-14 % of the entire surface.

The shrinkage is already triggered by a thermal treatment that occurs only once. Once it has been shrunk and cooled, the laminate cannot once again be brought to the point of shrinking by a second thermal treatment.

The multilayer, three-dimensionally structured fabric web according to the present invention can be composed of nonwoven fabric and scrim, in alternating fashion. The nonwoven fabrics on both sides of the scrim can be equal or unequal both in construction as well as in weight. In special cases, it is also possible to provide for interior layers made of two nonwoven fabrics adjacent to each other.

The structured fibrous web can be used in all areas in which a

high specific surface and a high fluid throughput are present along with a large particle retention capacity or a high compression strength in response to mechanical loads, especially at increased temperatures. Examples are filters as well as hygiene or medical products. The products according to the present invention can also be used for decorative purposes around the house, such as wall coverings.

Example 1

A biaxially elongated plastic netting made of polypropylene continuous filaments, having a weight of 7.8 g/m^2 and a mesh width of $7.6 \text{ mm} \times 7.6 \text{ mm}$, is positioned between two cross-laid, loose, staple nonwovens each having a weight of 10 g/m^2 and is conveyed to a spot welding reinforcement by calendaring between a smooth and an engraved steel roll. The welding surface of the engraved roll amounts to 9.6% at an engraving depth of 0.73 mm. The calendaring process takes place at a temperature of 140° C and at a line pressure of 30 kp/cm at a through-flow speed of 6 m/min . The width of the fabric is 50 cm.

The nonwoven fabric is composed of 90% core/sheath fibers having a core made of polyethylene terephthalate and a sheath made of copolyester, which melts at 120° C . The rest is viscose staple fiber. The titer of the core/sheath fiber amounts to 4.8 dtex and its cut length is 55 mm. The titer of the viscose staple fiber amounts to 3.3 dtex at a cut length of 60 mm.

The three-layer, planar fibrous web having an overall weight of 27.8 g/m^2 is subsequently subjected to a thermal shrinking treatment in a belt dryer at 170° C and a duration of 2 min and 20 s. The original 50-cm-wide half-finished material after the shrinkage and cooling has a width of only 16 cm and a weight per unit area of 20 g/m^2 . From this can be calculated a

linear shrinkage in the transverse direction of 68%, a surface shrinkage of 76.8%, and a linear shrinkage in the longitudinal direction of 27.6%.

5 The mathematical formulas for the shrinkage calculation are:

$$S_0 = \left(1 - \frac{G_v}{G_n}\right) \cdot 100 [\%]$$

$$S_q = \left(1 - \frac{b_n}{b_v}\right) \cdot 100 [\%]$$

$$S_L = \left(1 - \frac{G_v \cdot b_v}{G_n \cdot b_n}\right) [\%]$$

G_v Weight per unit area before shrinkage in g/m²

G_n weight per unit area after shrinkage in g/m²

b_v width of the fabric before shrinkage in m

b_n width of the fabric after shrinkage in m

15 S_0 surface shrinkage in %

S_q linear shrinkage in the transverse direction in %

S_L linear shrinkage in the longitudinal direction in %

20 In the following table, the thicknesses are represented, measured under varying loads at room temperature and after a storage time of over 48 hours at a load of 1 psi. Using the formulas indicated below, compression resistance K is calculated in addition to rerecovery W, and creep resistance KB, each expressed in %. The thickness measurement for
25 calculating the creep resistance is carried out at 0.2 psi contact pressure.

The thickness measurements were carried out as follows:

The sample was subjected for 30 seconds to a contact pressure of 0.6205 kPa psi and the thickness value was read out after the 30 seconds had elapsed. Immediately thereafter, the contact pressure was increased on the thickness measuring device to 1.3789 kPa by changing the weight, and the thickness was also read out after a further 30 seconds at precisely the same measuring location.

The same process was repeated, in each case for 30 seconds, in the sequence of contact pressures 3.4473, 6.8947, and again 0.6205 kPa.

To determine creep resistance KB, the test sample was subjected for 48 hours to a pressure of 1 psi at 60° C, and thereupon the thickness was determined at the contact pressure of 1.3789 kPa.

KW, W, and KB are calculated as follows:

The value for KW is obtained by dividing the thickness at 6.8947 kPa by the thickness at 0.6205 kPa and multiplying by 100 (result in %).

The value for W is obtained by dividing the thickness at 6.8947 kPa, at the completion of the measuring cycle, by the previously measured value at 6.8947 kPa and multiplying by 100 (result in %).

The value for KB is obtained by dividing the thickness of the test sample that is pressed at 60° C for 48 hours at 6.8947 kPa by the thickness of the unpressed test sample, in each case measured at 1.3789 kPa, and multiplying by 100 (result in %).

5

Unpressed layer construction	
thickness at	
0.6205 kPa	4.996 mm
1.3789 kPa	4.560 mm
3.4473 kPa	4.168 mm
6.8947 kPa	3.547 mm
0.6205 kPa	4.318 mm
KW (%)	71.00
W (%)	86.40

10

00000740-00201

15

Pressed fibrous web at 60° C for 48 hours	
thickness at	
1.3789 kPa	2.485 mm
KB (%)	53

[22750/492]

THREE-DimensionALLY STRUCTURED FIBROUS WEB AND A METHOD FOR
ITS MANUFACTURE

[Description]

Background of the Invention] FIELD OF THE INVENTION

5 The present invention [is related] relates to a
three-dimensionally structured fibrous [webs.] web and a
method for manufacturing a three-dimensionally structured
fibrous web.

By "three-dimensionally structured" is meant here fibrous webs
in which the orientation and the spatial coordination of the
individual fibers with respect to each other in any given
surface plane diverge from those in the next closest surface
plane.

In particular, the present invention relates to the field of
fibrous webs, in which [have at least one] nonwoven fabric
[layer, which is] layers are bonded on both sides to at least
one layer made of [an] a scrim, a lattice, or a netting and a [
20 A] method for its manufacture [is indicated.].

[Related Art]

From] BACKGROUND INFORMATION

25 U.S. Patent 4,302,495[, shows fibrous webs [according to the
species are known].

30 One or a plurality of layers made of discontinuous,
thermoplastic polymer fibers and one or a plurality of layers

composed of an open-mesh netting made of coarse, thermoplastic, continuous melt-blown fibers, which cross each other at a preestablished angle, are bonded to each other by thermal fusing, either continuously or in spot fashion, to produce a web having a uniform thickness. The randomly running short fibers have a diameter of between 0.5 and 30 μm at a weight per unit area of 10 to 15 g/m^2 . Both the combination, lattice/microfiber layer/lattice, as well as microfiber layer/lattice/microfiber layer are described. A material that may be preferred [material] for both the microfibers as well as the filaments of the lattice is polypropylene. A web of this type [has] may have a very high tensile strength, together with a porosity that can be precisely adjusted. The melt-blown microfiber layers determine the external appearance and, for example, the filtering properties, whereas the thermoplastic netting(s) aid in reinforcement, controlling the porosity, and, if appropriate, simulating the appearance of a woven textile fabric. Therefore, the material [is] may be suitable not only for use as filters, but also as a sterile packing material in surgery. Further application areas [are] may be chemically inert filter media or non-wettable, light-weight, thermal insulating layers for clothing, gloves, or boots.

The thermal bonding of the layers to each other [is] may be carried out under pressure, for example, between heated rolls, one of which having the appropriate engraving if spot-bonding is desired. In addition, heat radiation [can] may be applied before the heating is carried out between the rolls. The level of the heating effect [is] may be set so that the fiber materials soften without undergoing a temperature increase to the level of their crystalline melting point.

It was discovered that fibrous webs of this type [do] may not stand up to pressure spikes or other powerful mechanical

forces over a longer period of time without significant compaction, if, when packed, stored for extended periods, and transported, they are exposed to high pressures and temperatures up to 60° C, which is entirely usual in a shipment to tropical countries.

[Objective] In addition, three-dimensional webs are disclosed in US Patent 4,522,863; British Patent 1 331 817; US Patent 5,525,397 and WO 98/52458, the webs being composed of a scrim, lattice, or netting and being bonded to nonwoven fabric layers on both sides.

[The objective of]SUMMARY OF THE INVENTION

An objective of an exemplary embodiment and/or exemplary method the present invention is to [improve the aforementioned] indicate a three-dimensionally structured fibrous web [of the related art so that it] which stands up to pressure spikes up to 1 psi acting perpendicular to the surface plane without being destroyed, even at temperatures up to 60° C.

[In addition, the present invention indicates a method of manufacture for a fibrous web of this type.

Presentation of the Invention

The objective is achieved in a three-dimensionally structured multilayer fibrous web having the characterizing features of the first patent claim as well as in a method according to the first method claim. Advantageous embodiments are cited individually in the subclaims.

At least one nonwoven fabric layer is] According to an exemplary embodiment of the present invention, at least two

nonwoven fabric layers are bonded, in each case, to one scrim layer. The nonwoven fabric layers are made up of fibers that are bonded to each other mechanically and/or thermally and that, in the surface direction, possess a fold-like pattern in the form of geometric, repeating elevations or undulations.

Present in the [structure according to] above exemplary embodiment of the present invention is at least one thermoplastic scrim, lattice, or netting layer having continuous filaments crossing each other and bonded at the crossing points by fusion, the filaments having a thickness of 150 to 2000 μm between their crossing points, and having thickenings at the crossing points of up to seven times these values. For reasons of simplicity, this layer hereinafter is always termed a scrim, even if other structures having crossing individual filaments are at issue.

The mesh size of the scrim of the above exemplary embodiment, i.e., the distance in each case between two adjacent filament crossing points in the longitudinal direction, multiplied by the corresponding distance in the transverse direction, is 0.01 to 9 cm^2 , assuming that the filament crossing points in the longitudinal as well as in the transverse direction have a distance from each other that is not less than 0.10 [mm] cm.

The specific bond between fiber layers and the scrim layers [can be continuous, spot-form, or linear- or continuous-patterned.] may be of the spot type.

[The] In further exemplary embodiments of the present invention, the continuous filaments of the scrim are made up, for example, of polyethylene, polypropylene, polyamide-6, polyamide-6.6, polybutylene terephthalate, polyethylene terephthalate, polyester elastomers, copolyesters, copolymers made of ethylene and vinyl acetate or of polyurethane.

1
In [one advantageous] a further exemplary embodiment of the
present invention, the scrim is made up of a netting that is
biaxially elongated. The elongation in the direction of both
5 filament patterns is carried out in accordance with known
methods in the longitudinal direction by by passing through
the gap between a slower moving and a more rapidly moving
roll, the elongation ratio thus being determined by the ratio
of the more rapidly moving to the more slowly moving rolls. In
the transverse direction, the elongation is carried out using
10 an expanding tenter frame.

This known method brings about a reduction in the thickness of
the filaments between the mutual crossing points and therefore
a reduction in the weight per unit area of up to 95%.

[Laminated webs are also the subject matter of the present
invention as a result of a single- or double-sided coating of
fusion adhesive, which has a significantly lower melting point
and adhesion point than the plastic of the filament.

In the context] According to an aspect of a further exemplary
embodiment of the present invention, it is possible to carry
out the [single- or] double-sided covering of the scrim using
nonwoven fabric such that each nonwoven fabric layer has
25 different properties with respect to the configuration of its
folds or with respect to its inherent properties, such as
weight per unit area, type of fiber, and fiber bonding.

In general, in selecting the parameters for the nonwoven
30 fabrics with respect to composition, type of fiber, fiber
bonding, and fiber orientation, the worker skilled in the art
is guided by the properties known to him that these layers are
supposed to have. In the interest of a high inherent rigidity
of the elevations and undulations, it is necessary for the
35 nonwoven fabric fibers to be intensively bonded to each other.

If the fibers are fixed using a bonding agent, a bonding agent having a hard grip is preferable, because in this way the inherent rigidity and mechanical resistance of the fibrous web is increased overall.

[In a further advantageous embodiment of the present invention, each of the nonwoven fabric layers that is present can have fibers that are fused in planar fashion, these fused surfaces being in each case thermally bonded to the scrim.

It It is believed that it is advantageous if the distance from one filament crossing point to the next one in the scrim, as well as the degree of elongation and the filament strength in the longitudinal and transverse directions, are approximately the same, because in this way, after the shrinking process, elevations are produced having a circular base cross-section. These have proven to be the most resistant to pressure loads exerted perpendicular to the surface plane.

Depending on the starting material selected, multilayer fibrous webs [can] may be produced having weights of 20 to 3000 g/m². Products having lower weights per unit area are suitable, for example, for layers in diapers that absorb and distribute liquid, such as have up to 3000 g/m² for high-volume filter matting, which have a high retention capacity for the filtrate.

The present invention is explained in greater detail on the basis of the [Figures] Figure:

Figure 1 [depicts the subject matter according to] shows an exemplary embodiment of the present invention in a top view[;]_

[Figure 2 depicts a cross-section along the line A-A from

Figure 1:

Figure 3 depicts a cross-section as in Figure 2, but using nonwoven fabric layers of varying types.] DETAILED DESCRIPTION

5 First, Figure 1 is described: here [one of the possible embodiments of] an exemplary embodiment of a three-dimensionally structured fibrous web according to the present invention is represented in a top view. Composite 1 is composed of shrunk scrim 4 and both nonwoven fabric layers 2 and 3. They are bonded to the shrunk scrim but not to each other, such that, on both sides of the scrim, elevations 6 and depressions 7 are formed on the nonwoven fabrics. Between and beneath the elevations are located hollow spaces 12, 13, which are permeable to fluid media and which absorb particles and dust from them. The scrim is made up of monofilaments 5 that cross each other.

[In Figure 2, a cross-section along the line A-A from Figure 1 is represented; nonwoven fabrics 2 and 3 in areas 8 of depressions 7 are bonded to monofilaments 5 of scrim 4 using adhesive.

Figure 3 depicts a shrunk composite of nonwoven fabric and scrim, the distance between filaments 5 of the scrim and peaks 9 of elevations 6 is designated as reference numeral 10. The depicted cross-section, in contrast to Figure 2, has an asymmetrical design. Nonwoven fabric elevations 8 extend only in one direction perpendicular to the surface plane of the scrim. The scrim filaments on one side bear a co-extruded fusion adhesive 11 having a significantly lower melting and softening point than the remaining mass of the scrim. The nonwoven fabric is intensively bound to the scrim by fusion adhesive 11, position 11 simultaneously indicating the lowest point of depression 7. Position number 10 defines the distance between the scrim plane and peak 9 of elevations 6. The latter

result in a marked surface enlargement, which results in increased absorption capacity for particles that are to be deposited. Hollow spaces 12 between elevations 6 of the nonwoven fabric and of the scrim plane, oriented perpendicular to the surface plane, as well as open spaces 13 between depressions 7 and peaks 9 of elevations 6 are large enough to spontaneously absorb liquids of low- and medium-viscosity as well as multi-dispersion systems composed of solid particles and liquid solutions and possibly to convey them to absorbent layers situated below.

The] An exemplary embodiment of a method for manufacturing the three-dimensionally structured fibrous web according to the present invention is carried out by covering, in a planar fashion, a 3-300 g/m² heavy, unshrunk scrim, netting, or lattice made of thermoplastic continuous filaments with a nonwoven fabric on [one or] both sides and by bonding using generally known laminating techniques to form a planar nonwoven fabric. The nonwoven fabric can have been produced using all known measures, i.e., dry using combing, carding, or air exposure technology, using wet deposition, or using fibers that are spun from the melted mass, or continuous filaments. Subsequently, the composite is subjected to a thermal treatment, which is sufficient for the scrim to undergo a surface shrinking. The nonwoven fabric layers, which themselves undergo either no surface shrinkage or one that is significantly less in comparison to the scrim, give way perpendicular to the surface plane, forming elevations. The nonwoven fabric can be bonded generally either over the entire surface or over a partial surface. Perforated nonwoven fabrics can also be used for the method according to the present invention.

As a result of a further increase in temperature, the scrim in the nonwoven fabric is made to shrink. The shrinking

temperature is determined in accordance with the softening and melting range of the thermoplastics on which the scrim is based. To trigger a shrinkage, the temperature must lie between these two temperatures, the amount of shrinkage becoming higher the closer the temperature current actually affecting the knitted fabric approaches the melting temperature of the thermoplastic. Of course, the worker skilled in the art knows that, at the preestablished shrinkage temperature, the duration also exerts an influence on the extent of the surface shrinkage. The attainable amounts of shrinkage in the longitudinal and transverse directions, and the ratio of both amounts to each other, can be substantially predetermined by the choice of the scrim. Assuming an unhindered shrinkage free of contact, the ratio of longitudinal and transverse shrinkage is 1:1 if the monofilaments of the scrim have the same titer and the same rate of stretching in the longitudinal and transverse directions. If a different shrinkage is desired in the longitudinal and transverse directions, then knit [fabric] fabrics are selected whose monofilaments have been [stretched] stretched differently in the longitudinal and transverse directions, or whose titers turn out to be very different given the same [degree] rate of stretching. Scrim can also be used whose monofilaments in the longitudinal and transverse directions are created from different thermoplastics. In this case, the degree of shrinkage and the direction of shrinkage are determined by the components of the scrim, softening at a deeper level, a shrinkage temperature being selected which lies between the softening and the melting temperatures of the lower-melting components of the scrim.

The nonwoven fabric bonding and the lamination onto the scrim can also be carried out in one single step. Economy argues for this method. [In this case, the scrim is positioned between two loose nonwoven fabric layers, it is subsequently needed

mechanically or using water jets, yielding a composite, and it is acted upon by bonding agents using known impregnating technologies.]

5 As a nonfibrous bonding agent, liquid plastic dispersions are used, which are imprinted upon the composite either on one or on both sides, or a complete impregnation is carried out using a foamed mixture in a foam impregnating device or using an unfoamed mixture in a complete bath impregnation using the
10 liquid plastic dispersions. Subsequently, drying is carried out and the bonding agent is cured in the heat.

15 As a result of the thermoplastic activation of the adhering fibers within the nonwoven fabric, additional interior [reinforcement] reenforcement can be generated.

20 [In the case of high-pressure water jet needling, in one particular embodiment of the present invention, the opportunity exists at the same time to generate perforations in the nonwoven fabric.]

25 The ratio between longitudinal and transverse shrinkage determines the shape of the elevations in the nonwoven fabric layers. In a longitudinal/transverse ratio of 1:1, cone-shaped elevations arise that have, ideally, circular bases. In a longitudinal/transverse ratio not equal to 1, elevations arise having, ideally, oval cross-sections parallel to the base. If the shrinkage is completely prevented, for example, only in the longitudinal direction, in the longitudinal pattern,
30 continuous, groove-shaped elevations are formed on the nonwoven fabric, which, ideally, have the same amplitude over their entire length.

35 It was surprising that scrims having weights under 10 g/m² can be shrunk to up to 80% of the starting length despite the

nonwoven fabric covering on both sides having weights of at least 7 g/m². It would have been expected that the nonwoven fabrics would prevent the shrinkage of the scrim, especially at the [low] lower starting masses per unit area of the scrim.

However, this is not the case.

The following method variants [have proven to]of the above exemplary embodiment of the method according to the present invention may be especially advantageous for reasons of simplicity:

The scrim is covered on [one or on] both sides with an unbonded nonwoven and is subjected to a thermal embossing-calendering or ultrasound calendering. The resulting, planar, [two- or] three-layer fabric has sufficient bond strength. Subsequently, without using a bonding agent, the shrinking is carried out thermally or using water vapor. For these method variants, bicomponent fibers are used having a side-by-side, eccentric or concentric core/sheath structure. The nonwoven fabric covering(s) can be made 100% of this bicomponent fiber or it can be used in a blend using thermoplastic and/or non-thermoplastic homofil fibers. With respect to the choice of homofil fibers, no limitations are necessary.

The melting point of the bicomponent fibers, in comparison to the lower melting components, must be lower or equal to the melting point of the individual scrim filaments that trigger the shrinkage. It is expedient if the melting point difference is not greater than 40° C to prevent the nonwoven fabric layers from becoming very brittle.

Even if the use of thermoplastic polymers contributing to the melting bonding is not critical, it has proven to be advantageous, in a single-side nonwoven fabric covering, to use melting components which have a chemical similarity to the

thermoplastic polymers of the scrim. Otherwise, the danger arises of a poor bond strength after the lamination. In this connection, it is advantageous, for example for a scrim made of polyethylene terephthalate filaments, to use in the nonwoven fabric, polyester bicomponent fibers having copolyesters or polybutylene terephthalate, which melt at over 200° C as the sheath components.

Especially if the scrim and the nonwoven fabric are supposed to be bonded using thermal embossing-calendering or ultrasound reinforcement, it is advantageous to cover the scrim on both sides with nonwovens. After the calendering, both nonwovens above and below the scrim are bonded to each other in their open areas in a pattern. The scrim in this way is inserted into the composite so as to be inseparable. The number of thermal bonding points between the nonwoven fabric and the scrim in this unshrunk half-finished material is very low to the point of being negligible. The engraved surface of the embossing roll amounts to 4-30% of the entire contact surface.

In particular in the case of a slight difference in the melting temperatures between the scrim and the shell components of the bicomponent fibers, engraving rolls are preferably used having a bonding surface of only 4-14 % of the entire surface.

[The manufacture of the unshrunk layer material made of nonwoven, scrim, and a further nonwoven can also be carried out between two heated, smooth steel rolls under pressure.

During the shrinking, the original bonds in the nonwoven fabric are dissolved from a great extent to entirely, so that no resistance is presented to the shrinking of the scrim. Only during the cooling does a new bond arise between the nonwoven fabric fibers.]

The shrinkage is already triggered by a thermal treatment that occurs only once. Once it has been shrunk and cooled, the laminate cannot once again be brought to the point of shrinking by a second thermal treatment.

The multilayer, three-dimensionally structured fabric web according to the present invention can be composed of nonwoven fabric and scrim, in alternating fashion. The nonwoven fabrics on both sides of the scrim can be equal or unequal both in construction as well as in weight. In special cases, it is also possible to provide for interior layers made of two nonwoven fabrics adjacent to each other.

The structured fibrous web can be used in all areas in which a high specific surface and a high fluid throughput are present along with a large particle retention capacity or a high compression strength in response to mechanical loads, especially at increased temperatures. Examples are filters as well as hygiene or medical products. The products according to the present invention can also be used for decorative purposes around the house, such as wall coverings.

Example 1

A biaxially elongated plastic netting made of polypropylene continuous filaments, having a weight of 7.8 g/m² and a mesh width of 7.6 mm x 7.6 mm, is positioned between two cross-laid, loose, staple nonwovens each having a weight of 10 g/m² and is conveyed to a spot welding reinforcement by calendering between a smooth and an engraved steel roll. The welding surface of the engraved roll amounts to 9.6% at an engraving depth of 0.73 mm. The calendering process takes place at a temperature of 140° C and at a line pressure of 30 kp/cm at a through-flow speed of 6 m/min. The width of the fabric is 50 cm.

The nonwoven fabric is composed of 90% core/sheath fibers having a core made of polyethylene terephthalate and a sheath made of copolyester, which melts at 120° C. The rest is viscose staple fiber. The titer of the core/sheath fiber amounts to 4.8 dtex and its cut length is 55 mm. The titer of the viscose staple fiber amounts to 3.3 dtex at a cut length of 60 mm.

The three-layer, planar fibrous web having an overall weight of 27.8 g/m² is subsequently subjected to a thermal shrinking treatment in a belt dryer at 170° C and a duration of 2 min and 20 s. The original 50-cm-wide half-finished material after the shrinkage and cooling has a width of only 16 cm and a weight per unit area of 20 g/m². From this can be calculated a linear shrinkage in the transverse direction of 68%, a surface shrinkage of 76.8%, and a linear shrinkage in the longitudinal direction of 27.6%.

The mathematical formulas for the shrinkage calculation are:

$$S_0 = \left(1 - \frac{G_v}{G_n} \right) \cdot 100 [\%]$$

$$S_q = \left(1 - \frac{b_n}{b_v} \right) \cdot 100 [\%]$$

$$S_L = \left(1 - \frac{G_v \cdot b_v}{G_n \cdot b_n} \right) [\%]$$

G_v Weight per unit area before shrinkage in g/m²

G_n weight per unit area after shrinkage in g/m²

b_v width of the fabric before shrinkage in m

b_n width of the fabric after shrinkage in m

S_d surface shrinkage in %

S_q linear shrinkage in the transverse direction in %

S_l linear shrinkage in the longitudinal direction in %

5 In the following table, the thicknesses are represented,
measured under varying loads at room temperature and after a
storage time of over 48 hours at a load of 1 psi. Using the
formulas indicated below, compression resistance K is
calculated in addition to rerecovery W, and creep resistance
10 KB, each expressed in %. The thickness measurement for
calculating the creep resistance is carried out at 0.2 psi
contact pressure.

The thickness measurements were carried out as follows:

15 The sample was subjected for 30 seconds to a contact pressure
of 0.6205 kPa psi and the thickness value was read out after
the 30 seconds had elapsed. Immediately thereafter, the
contact pressure was increased on the thickness measuring
device to 1.3789 kPa by changing the weight, and the thickness
20 was also read out after a further 30 seconds at precisely the
same measuring location.

The same process was repeated, in each case for 30 seconds, in
the sequence of contact pressures 3.4473, 6.8947, and again
25 0.6205 kPa.

To determine creep resistance KB, the test sample was
subjected for 48 hours to a pressure of 1 psi at 60° C, and
thereupon the thickness was determined at the contact pressure
30 of 1.3789 kPa.

KW, W, and KB are calculated as follows:

The value for KW is obtained by dividing the thickness at
6.8947 kPa by the thickness at 0.6205 kPa and multiplying by
35 100 (result in %).

The value for W is obtained by dividing the thickness at 6.8947 kPa, at the completion of the measuring cycle, by the previously measured value at 6.8947 kPa and multiplying by 100 (result in %).

5

The value for KB is obtained by dividing the thickness of the test sample that is pressed at 60° C for 48 hours at 6.8947 kPa by the thickness of the unpressed test sample, in each case measured at 1.3789 kPa, and multiplying by 100 (result in %).

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
22

5

10

15
102260-0160000

Unpressed layer construction	
thickness at	
0.6205 kPa	4.996 mm
1.3789 kPa	4.560 mm
3.4473 kPa	4.168 mm
6.8947 kPa	3.547 mm
0.6205 kPa	4.318 mm
KW (%)	71.00
W (%)	86.40

Pressed fibrous web at 60° C for 48 hours	
thickness at	
1.3789 kPa	2.485 mm
KB (%)	53

[Abstract] ABSTRACT OF THE DISCLOSURE

5 A three-dimensionally structured fibrous web made up of
continuous-filament layers which alternate perpendicular to
the surface plane, and denser short-fiber layers that are
permanently thermally bonded in a continuous or spot-like
manner to the filament layers, the wide-mesh
10 continuous-filament layers representing a scrim, lattice, or
netting, has on the short-fiber layers repeating, fold- or
wave-shaped elevations. In the manufacturing process, all of
the layers of the laminate are subjected together to a
shrinkage process at a temperature which lies between the
softening and melting points of the scrim material.

[22750/492]

THREE-Dimensionally Structured Fibrous Web and a Method for
its Manufacture

Description

Background of the Invention

5 The present invention is related to three-dimensionally structured fibrous webs.

10 By "three-dimensionally structured" is meant here fibrous webs in which the orientation and the spatial coordination of the individual fibers with respect to each other in any given surface plane diverge from those in the next closest surface plane.

15 In particular, the present invention relates to fibrous webs which have at least one nonwoven fabric layer, which is bonded to at least one layer made of an scrim, a lattice, or a netting.

20 A method for its manufacture is indicated.

Related Art

25 From U.S. Patent 4,302,495, fibrous webs according to the species are known.

30 One or a plurality of layers made of discontinuous, thermoplastic polymer fibers and one or a plurality of layers composed of an open-mesh netting made of coarse, thermoplastic, continuous melt-blown fibers, which cross each other at a preestablished angle, are bonded to each other by thermal fusing, either continuously or in spot fashion, to produce a web having a uniform thickness. The randomly running short fibers have a diameter of between 0.5 and 30 μm at a

weight per unit area of 10 to 15 g/m². Both the combination, lattice/microfiber layer/lattice, as well as microfiber layer/lattice/microfiber layer are described. A preferred material for both the microfibers as well as the filaments of the lattice is polypropylene. A web of this type has a very high tensile strength, together with a porosity that can be precisely adjusted. The melt-blown microfiber layers determine the external appearance and, for example, the filtering properties, whereas the thermoplastic netting(s) aid in reinforcement, controlling the porosity, and, if appropriate, simulating the appearance of a woven textile fabric. Therefore, the material is suitable not only for use as filters, but also as a sterile packing material in surgery. Further application areas are chemically inert filter media or non-wettable, light-weight, thermal insulating layers for clothing, gloves, or boots.

The thermal bonding of the layers to each other is carried out under pressure, for example, between heated rolls, one of which having the appropriate engraving if spot-bonding is desired. In addition, heat radiation can be applied before the heating is carried out between the rolls. The level of the heating effect is set so that the fiber materials soften without undergoing a temperature increase to the level of their crystalline melting point.

It was discovered that fibrous webs of this type do not stand up to pressure spikes or other powerful mechanical forces over a longer period of time without significant compaction, if, when packed, stored for extended periods, and transported, they are exposed to high pressures and temperatures up to 60° C, which is entirely usual in a shipment to tropical countries.

Objective

The objective of the present invention is to improve the

1
aforementioned three-dimensionally structured fibrous web of
the related art so that it stands up to pressure spikes up to
1 psi acting perpendicular to the surface plane without being
destroyed, even at temperatures up to 60° C.

5
In addition, the present invention indicates a method of
manufacture for a fibrous web of this type.

Presentation of the Invention

10
The objective is achieved in a three-dimensionally structured
multilayer fibrous web having the characterizing features of
the first patent claim as well as in a method according to the
first method claim. Advantageous embodiments are cited
individually in the subclaims.

15
20
At least one nonwoven fabric layer is bonded, in each case, to
one scrim layer. The nonwoven fabric layers are made up of
fibers that are bonded to each other mechanically and/or
thermally and that, in the surface direction, possess a fold-
like pattern in the form of geometric, repeating elevations or
undulations.

25
30
Present in the structure according to the present invention is
at least one thermoplastic scrim, lattice, or netting layer
having continuous filaments crossing each other and bonded at
the crossing points by fusion, the filaments having a
thickness of 150 to 2000 μm between their crossing points, and
having thickenings at the crossing points of up to seven times
these values. For reasons of simplicity, this layer
hereinafter is always termed a scrim, even if other structures
having crossing individual filaments are at issue.

35
The mesh size of the scrim, i.e., the distance in each case
between two adjacent filament crossing points in the
longitudinal direction, multiplied by the corresponding
distance in the transverse direction, is 0.01 to 9 cm^2 ,

assuming that the filament crossing points in the longitudinal as well as in the transverse direction have a distance from each other that is not less than 0.10 mm.

- 5 The specific bond between fiber layers and the scrim layers can be continuous, spot-form, or linear- or continuous-patterned.

10 The continuous filaments of the scrim are made up, for example, of polyethylene, polypropylene, polyamide-6, polyamide-6.6, polybutylene terephthalate, polyethylene terephthalate, polyester elastomers, copolyesters, copolymers made of ethylene and vinyl acetate or of polyurethane.

15 In one advantageous embodiment of the present invention, the scrim is made up of a netting that is biaxially elongated. The elongation in the direction of both filament patterns is carried out in accordance with known methods in the longitudinal direction by passing through the gap between a slower moving and a more rapidly moving roll, the elongation ratio thus being determined by the ratio of the more rapidly moving to the more slowly moving rolls. In the transverse direction, the elongation is carried out using an expanding tenter frame.

25 This known method brings about a reduction in the thickness of the filaments between the mutual crossing points and therefore a reduction in the weight per unit area of up to 95%.

30 Laminated webs are also the subject matter of the present invention as a result of a single- or double-sided coating of fusion adhesive, which has a significantly lower melting point and adhesion point than the plastic of the filament.

35 In the context of the present invention, it is possible to carry out the single- or double-sided covering of the scrim using nonwoven fabric such that each nonwoven fabric layer has

different properties with respect to the configuration of its folds or with respect to its inherent properties, such as weight per unit area, type of fiber, and fiber bonding.

5 In general, in selecting the parameters for the nonwoven fabrics with respect to composition, type of fiber, fiber bonding, and fiber orientation, the worker skilled in the art is guided by the properties known to him that these layers are supposed to have. In the interest of a high inherent rigidity of the elevations and undulations, it is necessary for the nonwoven fabric fibers to be intensively bonded to each other.

10 If the fibers are fixed using a bonding agent, a bonding agent having a hard grip is preferable, because in this way the inherent rigidity and mechanical resistance of the fibrous web is increased overall.

15 In a further advantageous embodiment of the present invention, each of the nonwoven fabric layers that is present can have fibers that are fused in planar fashion, these fused surfaces being in each case thermally bonded to the scrim.

20 It is advantageous if the distance from one filament crossing point to the next one in the scrim, as well as the degree of elongation and the filament strength in the longitudinal and transverse directions, are approximately the same, because in this way, after the shrinking process, elevations are produced having a circular base cross-section. These have proven to be the most resistant to pressure loads exerted perpendicular to the surface plane.

25 Depending on the starting material selected, multilayer fibrous webs can be produced having weights of 20 to 3000 g/m². Products having lower weights per unit area are suitable, for example, for layers in diapers that absorb and distribute liquid, such as have up to 3000 g/m² for high-volume filter matting, which have a high retention capacity for the

filtrate.

The present invention is explained in greater detail on the basis of the Figures:

Figure 1 depicts the subject matter according to the present invention in a top view;

Figure 2 depicts a cross-section along the line A-A from Figure 1;

Figure 3 depicts a cross-section as in Figure 2, but using nonwoven fabric layers of varying types.

First, Figure 1 is described: here one of the possible embodiments of the present invention is represented in a top view. Composite 1 is composed of shrunk scrim 4 and both nonwoven fabric layers 2 and 3. They are bonded to the shrunk scrim but not to each other, such that, on both sides of the scrim, elevations 6 and depressions 7 are formed on the nonwoven fabrics. Between and beneath the elevations are located hollow spaces 12, 13, which are permeable to fluid media and which absorb particles and dust from them. The scrim is made up of monofilaments 5 that cross each other.

In Figure 2, a cross-section along the line A-A from Figure 1 is represented; nonwoven fabrics 2 and 3 in areas 8 of depressions 7 are bonded to monofilaments 5 of scrim 4 using adhesive.

Figure 3 depicts a shrunk composite of nonwoven fabric and scrim, the distance between filaments 5 of the scrim and peaks 9 of elevations 6 is designated as reference numeral 10. The depicted cross-section, in contrast to Figure 2, has an asymmetrical design. Nonwoven fabric elevations 8 extend only in one direction perpendicular to the surface plane of the scrim. The scrim filaments on one side bear a co-extruded fusion adhesive 11 having a significantly lower melting and softening point than the remaining mass of the scrim. The

nonwoven fabric is intensively bound to the scrim by fusion adhesive 11, position 11 simultaneously indicating the lowest point of depression 7. Position number 10 defines the distance between the scrim plane and peak 9 of elevations 6. The latter result in a marked surface enlargement, which results in increased absorption capacity for particles that are to be deposited. Hollow spaces 12 between elevations 6 of the nonwoven fabric and of the scrim plane, oriented perpendicular to the surface plane, as well as open spaces 13 between depressions 7 and peaks 9 of elevations 6 are large enough to spontaneously absorb liquids of low- and medium-viscosity as well as multi-dispersion systems composed of solid particles and liquid solutions and possibly to convey them to absorbent layers situated below.

The method for manufacturing the three-dimensionally structured fibrous web is carried out by covering, in a planar fashion, a 3-300 g/m² heavy, unshrunk scrim, netting, or lattice made of thermoplastic continuous filaments with a nonwoven fabric on one or both sides and by bonding using generally known laminating techniques to form a planar nonwoven fabric. The nonwoven fabric can have been produced using all known measures, i.e., dry using combing, carding, or air exposure technology, using wet deposition, or using fibers that are spun from the melted mass, or continuous filaments. Subsequently, the composite is subjected to a thermal treatment, which is sufficient for the scrim to undergo a surface shrinking. The nonwoven fabric layers, which themselves undergo either no surface shrinkage or one that is significantly less in comparison to the scrim, give way perpendicular to the surface plane, forming elevations. The nonwoven fabric can be bonded generally either over the entire surface or over a partial surface. Perforated nonwoven fabrics can also be used for the method according to the present invention.

As a result of a further increase in temperature, the scrim in

the nonwoven fabric is made to shrink. The shrinking temperature is determined in accordance with the softening and melting range of the thermoplastics on which the scrim is based. To trigger a shrinkage, the temperature must lie
5 between these two temperatures, the amount of shrinkage becoming higher the closer the temperature current actually affecting the knitted fabric approaches the melting temperature of the thermoplastic. Of course, the worker skilled in the art knows that, at the preestablished shrinkage
10 temperature, the duration also exerts an influence on the extent of the surface shrinkage. The attainable amounts of shrinkage in the longitudinal and transverse directions, and the ratio of both amounts to each other, can be substantially predetermined by the choice of the scrim. Assuming an unhindered shrinkage free of contact, the ratio of longitudinal and transverse shrinkage is 1:1 if the monofilaments of the scrim have the same titer and the same rate of stretching in the longitudinal and transverse directions. If a different shrinkage is desired in the longitudinal and transverse directions, then knit fabric are selected whose monofilaments have been stretched differently in the longitudinal and transverse directions, or whose titers turn out to be very different given the same degree of stretching. Scrims can also be used whose monofilaments in the
25 longitudinal and transverse directions are created from different thermoplastics. In this case, the degree of shrinkage and the direction of shrinkage are determined by the components of the scrim, softening at a deeper level, a shrinkage temperature being selected which lies between the softening and the melting temperatures of the lower-melting components of the scrim.

The nonwoven fabric bonding and the lamination onto the scrim can also be carried out in one single step. Economy argues for
35 this method. In this case, the scrim is positioned between two loose nonwoven fabric layers, it is subsequently needed mechanically or using water jets, yielding a composite, and it

is acted upon by bonding agents using known impregnating technologies.

As a nonfibrous bonding agent, liquid plastic dispersions are used, which are imprinted upon the composite either on one or on both sides, or a complete impregnation is carried out using a foamed mixture in a foam impregnating device or using an unfoamed mixture in a complete bath impregnation using the liquid plastic dispersions. Subsequently, drying is carried out and the bonding agent is cured in the heat.

As a result of the thermoplastic activation of the adhering fibers within the nonwoven fabric, additional interior reinforcement can be generated.

In the case of high-pressure water jet needling, in one particular embodiment of the present invention, the opportunity exists at the same time to generate perforations in the nonwoven fabric.

The ratio between longitudinal and transverse shrinkage determines the shape of the elevations in the nonwoven fabric layers. In a longitudinal/transverse ratio of 1:1, cone-shaped elevations arise that have, ideally, circular bases. In a longitudinal/transverse ratio not equal to 1, elevations arise having, ideally, oval cross-sections parallel to the base. If the shrinkage is completely prevented, for example, only in the longitudinal direction, in the longitudinal pattern, continuous, groove-shaped elevations are formed on the nonwoven fabric, which, ideally, have the same amplitude over their entire length.

It was surprising that scrims having weights under 10 g/m² can be shrunk to up to 80% of the starting length despite the nonwoven fabric covering on both sides having weights of at least 7 g/m². It would have been expected that the nonwoven fabrics would prevent the shrinkage of the scrim, especially

at the low starting masses per unit area of the scrim.
However, this is not the case.

The following method variants have proven to be especially advantageous for reasons of simplicity:

The scrim is covered on one or on both sides with an unbonded nonwoven and is subjected to a thermal embossing-calendering or ultrasound calendering. The resulting, planar, two- or three-layer fabric has sufficient bond strength. Subsequently, without using a bonding agent, the shrinking is carried out thermally or using water vapor. For these method variants, bicomponent fibers are used having a side-by-side, eccentric or concentric core/sheath structure. The nonwoven fabric covering(s) can be made 100% of this bicomponent fiber or it can be used in a blend using thermoplastic and/or non-thermoplastic homofil fibers. With respect to the choice of homofil fibers, no limitations are necessary.

The melting point of the bicomponent fibers, in comparison to the lower melting components, must be lower or equal to the melting point of the individual scrim filaments that trigger the shrinkage. It is expedient if the melting point difference is not greater than 40° C to prevent the nonwoven fabric layers from becoming very brittle.

Even if the use of thermoplastic polymers contributing to the melting bonding is not critical, it has proven to be advantageous, in a single-side nonwoven fabric covering, to use melting components which have a chemical similarity to the thermoplastic polymers of the scrim. Otherwise, the danger arises of a poor bond strength after the lamination. In this connection, it is advantageous, for example for a scrim made of polyethylene terephthalate filaments, to use in the nonwoven fabric, polyester bicomponent fibers having copolyesters or polybutylene terephthalate, which melt at over 200° C as the sheath components.

Especially if the scrim and the nonwoven fabric are supposed to be bonded using thermal embossing-calendering or ultrasound reinforcement, it is advantageous to cover the scrim on both sides with nonwovens. After the calendering, both nonwovens above and below the scrim are bonded to each other in their open areas in a pattern. The scrim in this way is inserted into the composite so as to be inseparable. The number of thermal bonding points between the nonwoven fabric and the scrim in this unshrunk half-finished material is very low to the point of being negligible. The engraved surface of the embossing roll amounts to 4-30% of the entire contact surface.

In particular in the case of a slight difference in the melting temperatures between the scrim and the shell components of the bicomponent fibers, engraving rolls are preferably used having a bonding surface of only 4-14 % of the entire surface.

The manufacture of the unshrunk layer material made of nonwoven, scrim, and a further nonwoven can also be carried out between two heated, smooth steel rolls under pressure.

During the shrinking, the original bonds in the nonwoven fabric are dissolved from a great extent to entirely, so that no resistance is presented to the shrinking of the scrim. Only during the cooling does a new bond arise between the nonwoven fabric fibers.

The shrinkage is already triggered by a thermal treatment that occurs only once. Once it has been shrunk and cooled, the laminate cannot once again be brought to the point of shrinking by a second thermal treatment.

The multilayer, three-dimensionally structured fabric web according to the present invention can be composed of nonwoven fabric and scrim, in alternating fashion. The nonwoven fabrics on both sides of the scrim can be equal or unequal both in

construction as well as in weight. In special cases, it is also possible to provide for interior layers made of two nonwoven fabrics adjacent to each other.

5 The structured fibrous web can be used in all areas in which a high specific surface and a high fluid throughput are present along with a large particle retention capacity or a high compression strength in response to mechanical loads, especially at increased temperatures. Examples are filters as
10 well as hygiene or medical products. The products according to the present invention can also be used for decorative purposes around the house, such as wall coverings.

Example 1

15 A biaxially elongated plastic netting made of polypropylene continuous filaments, having a weight of 7.8 g/m² and a mesh width of 7.6 mm x 7.6 mm, is positioned between two cross-laid, loose, staple nonwovens each having a weight of 10 g/m² and is conveyed to a spot welding reinforcement by calendering between a smooth and an engraved steel roll. The welding surface of the engraved roll amounts to 9.6% at an engraving depth of 0.73 mm. The calendering process takes place at a temperature of 140° C and at a line pressure of 30 kp/cm at a through-flow speed of 6 m/min. The width of the fabric is 50
25 cm.

The nonwoven fabric is composed of 90% core/sheath fibers having a core made of polyethylene terephthalate and a sheath made of copolyester, which melts at 120° C. The rest is
30 viscose staple fiber. The titer of the core/sheath fiber amounts to 4.8 dtex and its cut length is 55 mm. The titer of the viscose staple fiber amounts to 3.3 dtex at a cut length of 60 mm.

35 The three-layer, planar fibrous web having an overall weight of 27.8 g/m² is subsequently subjected to a thermal shrinking treatment in a belt dryer at 170° C and a duration of 2 min

and 20 s. The original 50-cm-wide half-finished material after the shrinkage and cooling has a width of only 16 cm and a weight per unit area of 20 g/m². From this can be calculated a linear shrinkage in the transverse direction of 68%, a surface shrinkage of 76.8%, and a linear shrinkage in the longitudinal direction of 27.6%.

The mathematical formulas for the shrinkage calculation are:

$$S_0 = \left(1 - \frac{G_v}{G_n}\right) \cdot 100 [\%]$$

$$S_q = \left(1 - \frac{b_n}{b_v}\right) \cdot 100 [\%]$$

$$S_L = \left(1 - \frac{G_v \cdot b_v}{G_n \cdot b_n}\right) [\%]$$

G_v Weight per unit area before shrinkage in g/m²

G_n weight per unit area after shrinkage in g/m²

b_v width of the fabric before shrinkage in m

b_n width of the fabric after shrinkage in m

S_0 surface shrinkage in %

S_q linear shrinkage in the transverse direction in %

S_L linear shrinkage in the longitudinal direction in %

In the following table, the thicknesses are represented, measured under varying loads at room temperature and after a storage time of over 48 hours at a load of 1 psi. Using the formulas indicated below, compression resistance K is calculated in addition to rerecovery W, and creep resistance KB, each expressed in %. The thickness measurement for calculating the creep resistance is carried out at 0.2 psi contact pressure.

The thickness measurements were carried out as follows:
The sample was subjected for 30 seconds to a contact pressure of 0.6205 kPa psi and the thickness value was read out after the 30 seconds had elapsed. Immediately thereafter, the contact pressure was increased on the thickness measuring device to 1.3789 kPa by changing the weight, and the thickness was also read out after a further 30 seconds at precisely the same measuring location.

The same process was repeated, in each case for 30 seconds, in the sequence of contact pressures 3.4473, 6.8947, and again 0.6205 kPa.

To determine creep resistance KB, the test sample was subjected for 48 hours to a pressure of 1 psi at 60° C, and thereupon the thickness was determined at the contact pressure of 1.3789 kPa.

KW, W, and KB are calculated as follows:

The value for KW is obtained by dividing the thickness at 6.8947 kPa by the thickness at 0.6205 kPa and multiplying by 100 (result in %).

The value for W is obtained by dividing the thickness at 6.8947 kPa, at the completion of the measuring cycle, by the previously measured value at 6.8947 kPa and multiplying by 100 (result in %).

The value for KB is obtained by dividing the thickness of the test sample that is pressed at 60° C for 48 hours at 6.8947 kPa by the thickness of the unpressed test sample, in each case measured at 1.3789 kPa, and multiplying by 100 (result in %).

5

Unpressed layer construction	
thickness at	
0.6205 kPa	4.996 mm
1.3789 kPa	4.560 mm
3.4473 kPa	4.168 mm
6.8947 kPa	3.547 mm
0.6205 kPa	4.318 mm
KW (%)	71.00
W (%)	86.40

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

Pressed fibrous web at 60° C for 48 hours	
thickness at	
1.3789 kPa	2.485 mm
KB (%)	53

What is claimed is:

1. A three-dimensionally structured fibrous web made up of continuous-filament layers, which alternate perpendicular to the surface plane, having a mesh size of 0.01 to 9 cm², and denser short-fiber layers that are permanently thermally bonded in a continuous or spot-like manner to the filament layers, the wide-meshed continuous-filament layers representing a scrim, lattice or netting in which filaments, which cross each other, are 150 to 2000 μm thick and which are made of thermoplastic plastic material, are thermally fused to each other at their points of contact, the filament crossing points in the longitudinal and transverse directions being not less distant from each other than 0.10 mm, wherein the short-fiber layers have repeating, fold- or wave-shaped elevations.

2. The fibrous web as recited in Claim 1, wherein, in the cross-section direction, a nonwoven fabric and a scrim alternate with each other.

3. The fibrous web as recited in Claim 1, wherein at least two adjacent interior layers are made of nonwoven fabric.

4. The fibrous web as recited in one of Claims 1 through 3, wherein the filaments of the scrim layer(s) at the crossing points have a thickness elevation up to seven times their thickness between the crossing points.

5. The fibrous web as recited in one of Claims 1 through 4, wherein a fusion adhesive mass is located on one or on both sides of the scrim.

6. The fibrous web as recited in one of Claims 1 through 5, wherein the individual fibers of the nonwoven fabric are bonded to each other using a bonding agent that has a hard

grip.

7. The fibrous web as recited in one of Claims 1 through 5, wherein the nonwoven fabric layers are made up of core/sheath or side-by-side bicomponent fibers, the components of each fiber being different with respect to their softening point.

8. The fibrous web as recited in one of Claims 1 through 7, wherein the nonwoven fabric has fibers melted in a uniplanar manner, the fused surface being in each case bonded thermally to the scrim.

9. A method for manufacturing a three-dimensionally structured fibrous web in the configuration according to Claim 1, in which at least one lattice, scrim, or netting, weighing 3 to 300 g/m², made of plastic continuous filaments having a mesh size of 0.01 to 9 cm², at distances of the adjacent filament crossing points of not less than 0.01 mm, is covered by a nonwoven fabric on one or both sides, and all layers are bonded to each other in continuous fashion using generally known laminating techniques, wherein subsequently all layers of the laminate are subjected together to a shrinking process at a temperature which lies between the softening and melting ranges of the scrim material.

10. The method as recited in Claim 9, wherein, at the same time the layers are laminated to each other, the interior fiber bond is produced in the nonwoven fabric layer(s), by positioning the scrim between loose nonwoven layers, then needling the entirety mechanically or using water jets, and providing bonding agents, after which the drying and the shrinking process begins.

11. The method as recited in Claim 9 or 10, wherein, along with the water jet needling, perforations in the nonwoven fabric are produced at the same time.

12. The method as recited in Claim 9, wherein one or a plurality of scrims are covered on one or on both sides with an unbonded nonwoven, which is made up at least partly of bicomponent fibers having a high- and a low-melting component, the latter component having a melting point that is not higher than that of the shrinkable component of the scrim, the entirety being subject to a thermal embossing-calendering or an ultrasound calendering, and subsequently the shrinking being carried out as a result of the influence of heat or using water vapor.

13. The method as recited in one of Claims 9 through 12, wherein the scrim(s), before being processed to form the multilayer fabric, is (are) stretched in the longitudinal direction between rolls that are running at different speeds, and is (are) stretched in the transverse direction using an expanding tenter frame.

14. The method as recited in Claim 9 or 13, wherein a scrim that is coated on one or on both sides with a fusion adhesive is coated with the nonwoven fabric, and the entirety shrinks under the influence of heat, the fusion adhesive being selected so that it has a lower melting and adhesion point than the material of the scrim filaments.

15. The method as recited in one of Claims 9 or 12 through 14, wherein, before the shrinking, for bonding in each case one nonwoven layer and one scrim, the nonwoven fabric fibers in certain surface areas are melted on using ultrasound or a thermal embossing, these melted surfaces at the same time being pressed onto the scrim.

Abstract

A three-dimensionally structured fibrous web made up of continuous-filament layers which alternate perpendicular to the surface plane, and denser short-fiber layers that are permanently thermally bonded in a continuous or spot-like manner to the filament layers, the wide-mesh continuous-filament layers representing a scrim, lattice, or netting, has on the short-fiber layers repeating, fold- or wave-shaped elevations. In the manufacturing process, all of the layers of the laminate are subjected together to a shrinkage process at a temperature which lies between the softening and melting points of the scrim material.

Fig.2


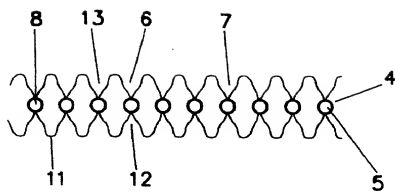


Fig.3



U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

DECLARATION AND POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.
22750/492

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name,

I believe I am an original, first, and joint inventor of the subject matter that is claimed and for which a patent is sought on the invention entitled **THREE-Dimensionally STRUCTURED FIBROUS WEB AND A METHOD FOR ITS MANUFACTURE**, the specification of which was filed as International Application **PCT/EP99/08225** on **October 29, 1999**.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

PRIOR FOREIGN APPLICATION(S)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. § 119
Federal Republic of Germany	199 00 424.2	08 January 1999 ✓		YES

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys:

Richard L. Mayer (Reg. No. 22,490)

SEND CORRESPONDENCE, AND DIRECT TELEPHONE CALLS TO:

KENYON & KENYON
One Broadway
New York, New York 10004
(212) 425-7200 (phone)
(212) 425-5288 (facsimile)



26646

PATENT TRADEMARK OFFICE

I understand and hereby acknowledge that the law firm of Kenyon & Kenyon ("K&K") represents the company to which rights in the invention have been or are being assigned and does not represent me or my interests as my attorney or otherwise (except to the extent that, in my capacity as employee or consultant, it is representing me by representing said company). Although a United States patent application is nominally filed and prosecuted in the U.S. Patent and Trademark Office in the name(s) of the inventor(s), I further understand that K&K has prepared a United States patent application relating to a **Three-Dimensionally Structured Fibrous Web And A Method for Its Manufacture** that I invented on behalf of its client, not me, and that it will conduct the prosecution of that application and of any corresponding applications on behalf of its client, not me.

I declare that all statements made herein of my own knowledge are true and all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF INVENTOR	FAMILY NAME GROITZSCH	FIRST GIVEN NAME Dieter	SECOND GIVEN NAME
RESIDENCE & CITIZENSHIP	CITY D-69493 Hirschberg <i>DEX</i>	STATE OR FOREIGN COUNTRY Federal Republic of Germany ✓	COUNTRY OF CITIZENSHIP Federal Republic of Germany ✓
POST OFFICE ADDRESS	POST OFFICE ADDRESS Hermann-Löns-Straße 6A	CITY D-69493 Hirschberg	STATE & ZIP CODE/COUNTRY Federal Republic of Germany
Signature <i>Dieter Groit</i>		Date 7. July 2001	

2-00

FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	<u>SCHAUT</u>	<u>Gerhard</u>	
RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	D-69502 <u>Hemsbach</u> <u>DEX</u>	<u>Federal Republic of Germany</u>	<u>Federal Republic of Germany</u>
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
	<u>Brunhildstraße 9</u>	<u>D-69502 Hemsbach</u>	<u>Federal Republic of Germany</u>
Signature <u>G. Schaut</u>		Date 7. July 2001	
FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	<u>GRIMM</u>	<u>Hans-Jörg</u>	
RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	D-69469 <u>Weinheim</u> <u>DEX</u>	<u>Federal Republic of Germany</u>	<u>Federal Republic of Germany</u>
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
	<u>Am Drachenstein 28</u>	<u>D-69469 Weinheim</u>	<u>Federal Republic of Germany</u>
Signature <u>H. Grimm</u>		Date 7. July 2001	

3-00
00000710.000001
100000